



The University of Miami / Marine Operations Requesting the Corelube System

- There is no charge for the use of the Corelube.
- Email mtgtech@rsmas.miami.edu to make a request to use the Corelube system.
- The requesting institute/university pays for the shipping TO and FROM the University of Miami.
- Bushings are provided, we ask that a set be replaced after use. See page 3 for ordering.
- Lubricant is not provided, that is left up to the institute/university to obtain.
- FedEx shipping is preferred, please provide the following (we will create shipping label & ship)
 - FedEx Account number (and internal reference # if needed for your institute/university)
 - Point of contact
 - Address
 - Phone number
 - Type of delivery (next day, express saver, ground, etc...)
- If other carrier is preferred, please let us know. Once items are packed, we will provide weight, dimensions and insurance amount. Create a shipping label and email label to mtgtech@rsmas.miami.edu so we can print it out and then ship out the Corelube system.
- There will be two, black, Pelican cases shipped (see page 2 for images of items in cases).
 - 1 case will have the Corelube system, hoses and manual.
 - 2nd case will have the lubricant tank (no lubricant).
- Once work is completed, please email mtgtech@rsmas.miami.edu to coordinate the return shipping.
- When shipping back to the University of Miami, please ship to the following address and POC.
 - University of Miami / RSMAS
 - Marine Operations
 - 4600 Rickenbacker Cswy
 - Miami, FL 33149

Don Cucchiara
305 421-4376

University of Miami / Marine Operations – Corelube



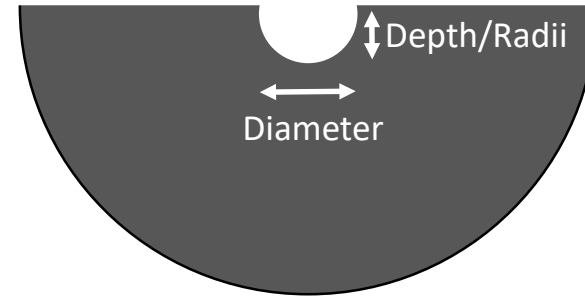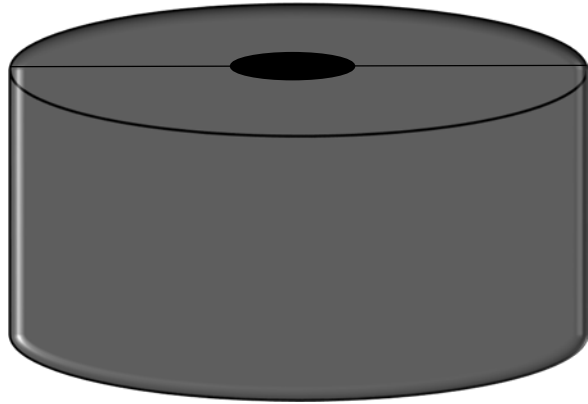

www.corelube.com (sales@corelube.com)

Part #: 2100-Bushing .322

(Nov. 2019 pricing: \$76.65/set, set=4 pieces or halves)

Center hole measurements – use calipers

Depth/Radii: $11/64''$ ($\pm 1/64''$)

Diameter: $21/64''$ ($\pm 1/64''$)

$21/64'' = 0.328''$

GUIDE BUSHING SETS



CoreLube Equipment
Cable Lubrication & Cleaning Specialist

CORELUBE 2100-BOS SYSTEM

Apr. 2010

2100-BOS BUSHING SETS

The ID of the bushings are machined larger than the cable diameters listed by 2%. This is to allow for cable diameter variance.

PART NUMBERS


2100-Bushing 0.125
2100-Bushing 0.156
2100-Bushing 0.187
2100-Bushing 0.197
2100-Bushing 0.219
2100-Bushing 0.236
2100-Bushing 0.250
2100-Bushing 0.281
2100-Bushing 0.305
2100-Bushing 0.312
2100-Bushing 0.315
- 2100-Bushing 0.322
2100-Bushing 0.325
2100-Bushing 0.375
2100-Bushing 0.450
2100-Bushing 0.464
2100-Bushing 0.472
2100-Bushing 0.484
2100-Bushing 0.500
2100-Bushing 0.562
2100-Bushing 0.625
2100-Bushing 0.680
2100-Bushing 0.750
2100-Bushing 0.866
2100-Bushing 0.875
2100-Bushing 1.000
2100-Bushing 1.125
2100-Bushing 1.140
2100-Bushing 1.181
2100-Bushing 1.250
2100-Bushing 1.312
2100-Bushing 1.340
2100-Bushing 1.375
2100-Bushing 1.417
2100-Bushing 1.500
2100-Bushing 1.614
2100-Bushing 1.625
2100-Bushing 1.680
2100-Bushing 1.693

CABLE DIAMETERS

Fits Cable Diameter .125" — 3.18mm
Fits Cable Diameter .156" — 3.96mm
Fits Cable Diameter .187" — 4.75mm
Fits Cable Diameter .197" — 5.00mm
Fits Cable Diameter .219" — 5.56mm
Fits Cable Diameter .236" — 6.00mm
Fits Cable Diameter .250" — 6.35mm
Fits Cable Diameter .281" — 7.16mm
Fits Cable Diameter .305" — 7.75mm
Fits Cable Diameter .312" — 7.94mm
Fits Cable Diameter .315" — 8.00mm
Fits Cable Diameter .322" — 8.18mm
Fits Cable Diameter .325" — 8.25mm
Fits Cable Diameter .375" — 9.53mm
Fits Cable Diameter .450" — 11.43mm
Fits Cable Diameter .464" — 11.8mm
Fits Cable Diameter .472" — 12.0mm
Fits Cable Diameter .484" — 12.3mm
Fits Cable Diameter .500" — 12.7mm
Fits Cable Diameter .562" — 14.3mm
Fits Cable Diameter .625" — 15.9mm
Fits Cable Diameter .680" — 17.3mm
Fits Cable Diameter .750" — 19.0mm
Fits Cable Diameter .866" — 22.0mm
Fits Cable Diameter .875" — 22.2mm
Fits Cable Diameter 1.000" — 25.4mm
Fits Cable Diameter 1.125" — 28.6mm
Fits Cable Diameter 1.140" — 29.0mm
Fits Cable Diameter 1.181" — 30.0mm
Fits Cable Diameter 1.250" — 31.7mm
Fits Cable Diameter 1.312" — 33.3mm
Fits Cable Diameter 1.340" — 34.0mm
Fits Cable Diameter 1.375" — 34.9mm
Fits Cable Diameter 1.417" — 36.0mm
Fits Cable Diameter 1.500" — 38.1mm
Fits Cable Diameter 1.614" — 41.0mm
Fits Cable Diameter 1.625" — 41.3mm
Fits Cable Diameter 1.680" — 42.7mm
Fits Cable Diameter 1.693" — 43.0mm

Selecting the correct size Bushing:
Ideally the Bushings should match the cable diameter, however it is acceptable if the guide bushing is larger than the cable diameter by as much as 10% to 15%.

GUIDE BUSHING SET




A 76.65

1 SET = 2 BUSHINGS

Bushings are sold as a set

GUIDE BUSHING

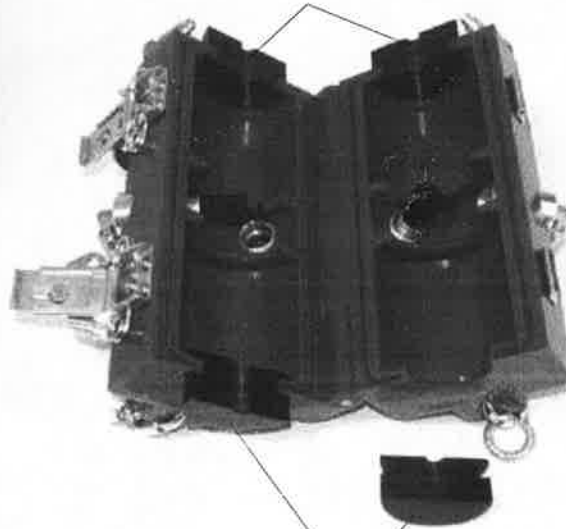

GUIDE BUSHING

Bushing sets can be made to order to any size if required.



CoreLube Equipment

Cable Lubrication & Cleaning Specialist
Phone: 403-529-9845 Fax: 403-527-1369
E-mail: sales@corelube.com
WWW.CORELUBE.COM